




AM - TANK

AM-TANK 116 GAS

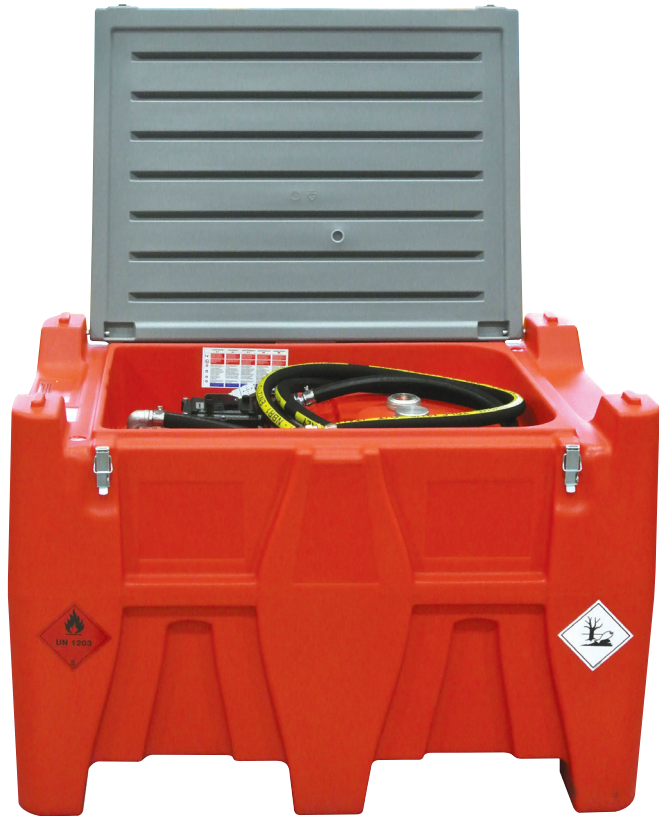

Portable 116-gallon tanks manufactured in high density linear roto-molded polyethylene for the safe and reliable transport and supply of Gasoline and Diesel. AM-TANK 116 offers a lightweight, robust, and portable tank solution giving users the ultimate convenience to refuel their fleet remotely on-site. Assembled and ready to use, this innovative tank can be easily loaded on the back of the pick-up truck and quickly plugged to the truck battery.

Tanks are equipped with:

- 2" filling plug equipped with three-effects (pressure/de-pressure/overturning) air vent device.
- Integrated forklift pockets (to lift when full).
- Integrated handles (to lift when empty).
- Integrated recesses for securing with ratchet lashing straps during transport.
- Integrated covering lid to provide protection against bad weather conditions, UV rays and equipped with lockable draw latches.
- Suction net filter to stop and separate impurities.
- Fuel level indicator.
- 13 ft grounding cable with clamp.

Fuel Transfer Unit:

- EX50 cULus-listed fuel transfer pump, 12V, flow-rate: 15 gpm at-the-nozzle, duty cycle: 30 min, anti-noise filter, thermal protection, explosion-proof.
- 13 ft cable with clamps for battery connection
- 13 ft. antistatic and flexible dispensing hose
- A60 Explosion-proof Auto-nozzle.

Features:

- Nominal capacity: 116 gal [440 lt]
- Tank total length: 47,2 in [120 cm]
- Tank total width: 31,5 in [80 cm]
- Tank total height: 30,9 in [78,5 cm]
- Tank total weight**: 114 lbs [52 kg]

** (including fuel unit and accessories)

